

ROLBA 500



IROLBA 500



The Rolba R500 is unique in terms of size and power. The self-propelled snow cutter blower is equipped with a diesel engine that meets the current EU Stage V standards. It is conviently operated by using the built-in joystick and display. Thanks to the front, rear, all-wheel and crab steering it is possible to clear snow in tight places. Additionally various options and clearing widths are available to choose from. Apart from direct ejection, various ejector tube lengths are available and even a telescopic ejector tube. The Rolba 500 can be prepared for multiple use, for example, with regard to a boom mower. So the machine is also ideal for an use during summer season. The hydraulically tiltable bonnet allows easy access to the engine compartment for easier maintenance.

■ TECHNICAL DATA

Rolba 500 with two-stage ZAUGG snow blower

Clearing capacity	1,800 t/h
Clearing widths	180 / 200 / 210 cm
Clearing height in one pass	130 cm
Casting distance	up to 40 m
Turning radius	approx. 4 - 8 m
Clearing speed	0.15 - 40 km/h
Engine output	170 kW
Fuel tank	150
Total weight	approx. 8,000 kg



■ TECHNICAL DATA


Rolba 500 with boom mower

Attachment plate type	VSS-A / F1
Maximum output at the PTO stub	75 kW
Direction of rotation of PTO (shaft viewed from the front on the stub)	left (counterclockwise)
Speeds at PTO shaft	540 rpm @ 1350 rpm diesel 750 rpm @ 1876 rpm diesel
PTO shaft profile	ZWP 13/4" 6-part acc. to DIN 9611



IROLBA 500



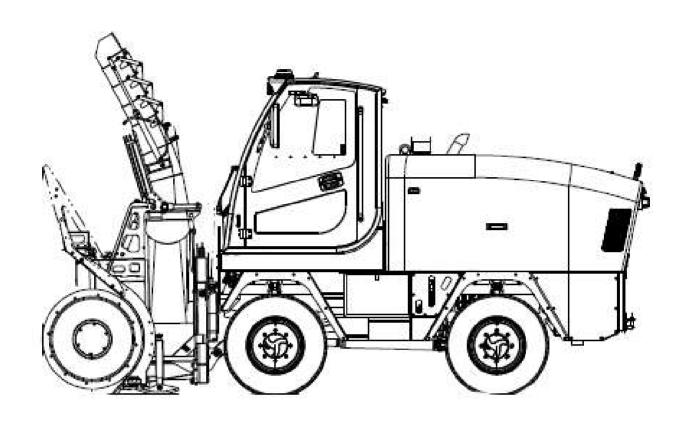

Dimensions Rolba 500	Value
Overall length	545 cm
Wheelbase	200 cm
Total width (incl.mirrors)	200 cm
Vehicle width	165 cm
Vehicle height	approx. 300 cm
Min. turning radius	approx. 480 cm (with all-wheel steering)











CONTACT

Holzmatt 651b | CH - 3537 Eggiwil

L +41 (0)34 491 81 11

info@zaugg.swiss

info@zaugg.swiss

www.zaugg.swiss